




TECHNICAL DATA		
Product type	Curved edge two layer parquet - QCXE	
Reaction to fire	EN 14342:2013 Table 1	D _{fl} - s1
Emission of formaldehyde	EN 14342	E1
Thermal conductivity (W/m K)	EN 14342:2013 Table 2	0.16
Biological durability	EN 335	UC 1
Moisture content	EN 13183	8% ± 2%

GEOMETRICAL CHARACTERISTICS (FIG 1)		
Position	Value	Tolerance
Length	According to layout	±1 mm
Width	According to layout	±1 mm
A	12 mm	±0.5 mm
B	5 mm	±0.5 mm
C	6 mm	±0.5 mm
D	6 mm	±1 mm
E	1 mm	±0.2 mm
F	1.5 mm	±0.2 mm
Lipping		≤0.3 mm

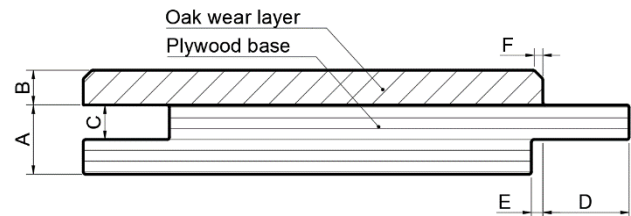

INSTALLATION
Appropriate installation method - glue down or nailed
To be installed according to specified layout plan
Underfloor heating - compatible with self regulating system
For more information contact the manufacturer